

EPSON Professional Media Adhesive Vinyl

For Use With:


EPSON Stylus® Pro 7500

EPSON Stylus Pro 9500

Product Information

Adhesive Vinyl is the perfect choice for outdoor signage that requires adhesive backing. This durable, wet-strength media boasts a waterproof base that's ideal for indoor or outdoor use. In fact, it can be used for outdoor displays for up to four months before fading occurs. For longer life, a top lamination layer to extend the life of the print is required. Best of all, its pressure sensitive backing makes it possible to remove and reposition signage within the first 24 hours of application.

Like all of Epson's innovative media, this paper is engineered to give you the highest resolution and color saturation possible. Epson's printer driver software actually optimizes the amount of ink released onto the page, based on the type of paper used. As always, EPSON supplies guarantee EPSON quality.

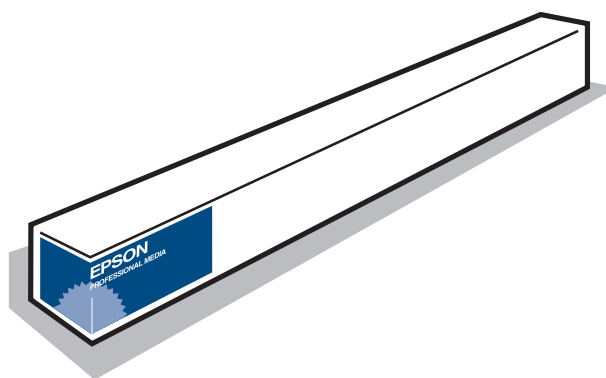

Features/Benefits

- Water resistant surface for outdoor display up to four months without lamination
- Re-positionable adhesive for easy mounting the first 24 hours
- Matte surface to eliminate glare
- Dries instantly for easy handling with Epson inks

Feature Checklist

Feature	Performance	Additional Comments
Indoor/outdoor usage	Indoor and outdoor	UV lamination is recommended for outdoor usage.
Light-fastness	One year outdoors (laminated)	One year lightfast rating is laminated with a vinyl based UV film, and is based on accelerated testing.
	Four months outdoors (unlaminated)	Four month lightfast rating is based on an accelerated light test with an actual rain test at 95% RH, 75°F with a rain cycle of 18 minutes every 120 minutes.
Archivability	Not recommended	
Resistance to water	Good	Bleeding does not occur with incidental water contact. However, surface lamination is recommended to protect the outer coating when it's continuously subjected to wet conditions. The base is waterproof.
Ink drying time	Immediate (less than 30 seconds)	Ink is dry to the touch after printing. However, it takes 24 hours before it cures and becomes durable.
Lamination feasibility	Pressure sensitive	A vinyl-based film that contains a UV absorbent is recommended for lamination purposes. For anti-graffiti purposes, use a fluoride-based film (i.e. Tedlar™). For use in direct sunlight, avoid polyester or polycarbonate film.
Surface adhesion	Flat surfaces only	For best results, apply the adhesive to a clean, flat surface. And, test it before applying it to the final print. Stretching the adhesive is not recommended, as the vinyl may shrink over time.
Adhesive backing	Pressure sensitive	Backing can be repositioned within the first 24 hours after mounting. Then it becomes permanent.

NOTE: Actual print stability and longevity will vary according to image, display conditions, light intensity, humidity, atmospheric conditions, and post-printing treatments. Epson does not guarantee stability or longevity. For maximum print life, display all prints under glass or lamination or properly store them.